

SkyBell® Video Doorbell

SkyBell is a high-definition video doorbell that lets homeowners enjoy new levels of security, control and convenience wherever they are in the world. End-users can remotely check doorbell activity on the Honeywell Total Connect® 2.0 Remote Services app, and see, hear and speak to visitors at their doors from their iPhone® or iPad® via the SkyBell HD app.

The IP65-rated device is built to withstand the harshest outdoor climates, with a temperature range of -40°F to 140°F (-40°C to 60°C). As sleek and attractive as it is functional, the SkyBell Video Doorbell is a stylish addition to any home.

Part of a dynamic, growing ecosystem, this solution provides security dealers with an excellent way to drive RMR, deliver a great user experience and enhance their connected home offering.



Works with Honeywell Total Connect 2.0 Remote Services




FEATURES & BENEFITS

- **Two-Way Audio**
Homeowners can enjoy a full, two-way conversation with visitors from their iPhone or iPad
- **Motion Sensor**
SkyBell Video Doorbell alerts homeowners when visitors are in front of their door, whether or not the button is pressed
- **Full Color Night Vision**
Homeowners can feel safe knowing they can view visitors at night in color HD
- **On-Demand Monitoring**
SkyBell is “Always On” so homeowners can start a live video stream at any time for remote monitoring.
- **Silent Mode**
Homeowners can turn off their indoor chime and receive notifications on their iOS devices—perfect for when someone is sleeping

*Audio and high-definition video viewing accessible through the SkyBell HD app.

SkyBell® Video Doorbell Technical Specifications

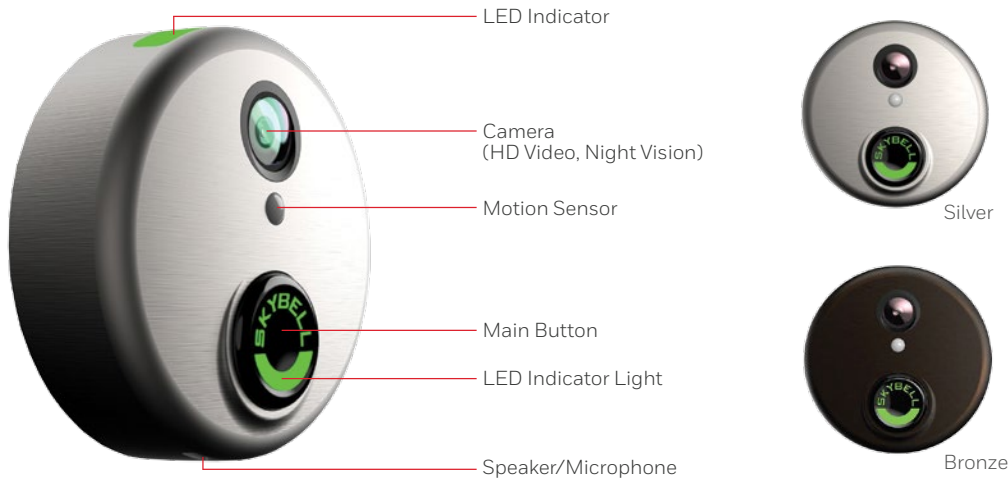

SYSTEM REQUIREMENTS

Power Input: Wired power connection to in-home mechanical door chime 10-36VAC, 10VA or 12V DC with an amp rate of 0.5 to 1.0

Wi-Fi® Router: 802.11 b/g/n, 2.4GHz

Initial Set-up: Requires use of smartphone or tablet and a high-speed Internet connection

Operating System (smartphone/tablet): Apple® iOS 8.1 or later, Android™ 2.X or later (Available soon)

TECHNICAL SPECIFICATIONS

Camera: 1080p/720p HD

Video: H264 x 30FPS HD

Microphone: MEMS digital omnidirectional PDM

Speaker: 110 dB SPL @ 1 em, peak output 2 Watt

Motion Sensor: PIR detection 180° @ 15 ft.

Night Vision: Full Color Night Vision 15 ft.

Field of View: 180°

Data Transfer Speed: SuperSpeed 2x (150 MHz)

Bluetooth: Low energy

Materials/Finish: Oil Rubbed Bronze/Silver

Battery: Built-in for power regulation

Operating Temperature: -40°F to 140°F (-40°C to 60°C)

Weather Proofing: IP 65

DIMENSIONS

Diameter: 2.8 inches (7.1 em)

Depth: 0.9 inches (2.2 em)

Weight: 1.9 oz (53.8 g)

POWER REQUIREMENTS

SkyBell requires a wired AC power source connection to a doorbell transformer, supporting either a mechanical door chime or a digital door chime*.

Voltage: 120/130v AC or 220/230/240v AC

Transformer Range: 8-36v AC, 8-15 VA

Low Voltage Transformer (UK/Europe): 8-36v AC, 1-AMP 8-15 VA

***Digital Door Chime:**

Requires a digital adapter, available through SkyBell

ORDERING

Video Doorbell Silver	DBCAM
Video Doorbell Bronze	DBCAM-BR

For more information

www.SkyBell.com

Honeywell Security and Fire

2 Corporate Center Dr. Suite 100

P.O. Box 9040

Melville, NY 11747

1.800.467.5875

www.honeywell.com

All other trademarks are the property of their respective owners.

L/SYKBELLD/D | 03/2016
© 2016 Honeywell International Inc.

Honeywell